

Login on the webpage:

Default IP: 192.168.1.121
 Default Subnetmask: 255.255.255.0
 Default password: admin

Login

Password:

☐ Remember Password

Go to the Advanced Menu and then Firmware

Status

Configuration

Advanced

Welcome Menu

Password

System

Firmware

Device List

Refresh

1 Name:TRX IP:192.168.1.121

It is a two phase update.
 Always install the corresponding
 MCU and ARM updates.

Do not mix them up.

The screenshots may change with the
 installed Firmware version.

Update MCU first:

Step 1: Click the "Update" Button

Firmware

MCU: v2.1

ARM: v3.7

Step 2: Browse for the update files. You need to fill in all 3 files here

Update MCU --> Upload File

BANK 0(.h00):

C:\fakepath\SANDEX-N001-A90-MCU-V3.3.h00

Browse

BANK 1(.h01):

C:\fakepath\SANDEX-N001-A90-MCU-V3.3.h01

Browse

BANK 2(.h02):

C:\fakepath\SANDEX-N001-A90-MCU-V3.3.h02

Browse

Upload


Next

Cancel

Step 3: Press the "Upload" Button and wait for the Upload to finish

Step 4: Press "Next" Button. → It takes about one minute to update.

Update MCU --> Update Progress




Complete

Manually reboot the device

Step 5: Please Restart the device.

Update ARM

Step 6: Browse for the update file. → **Do not unzip the *.tar.gz file.**

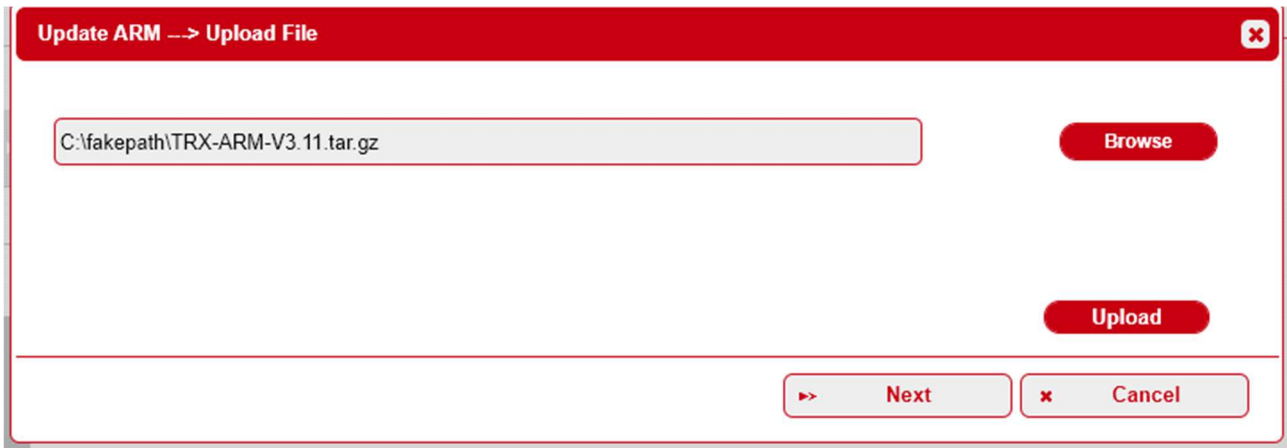

Update ARM --> Upload File

C:\fakepath\TRX-ARM-V3.11.tar.gz


Browse

Upload

Next Cancel

Step 7: Press the "Upload" Button if available otherwise the "Next" Button and wait for the upload to finish

Step 8: Press "Next" Button to start the Update.

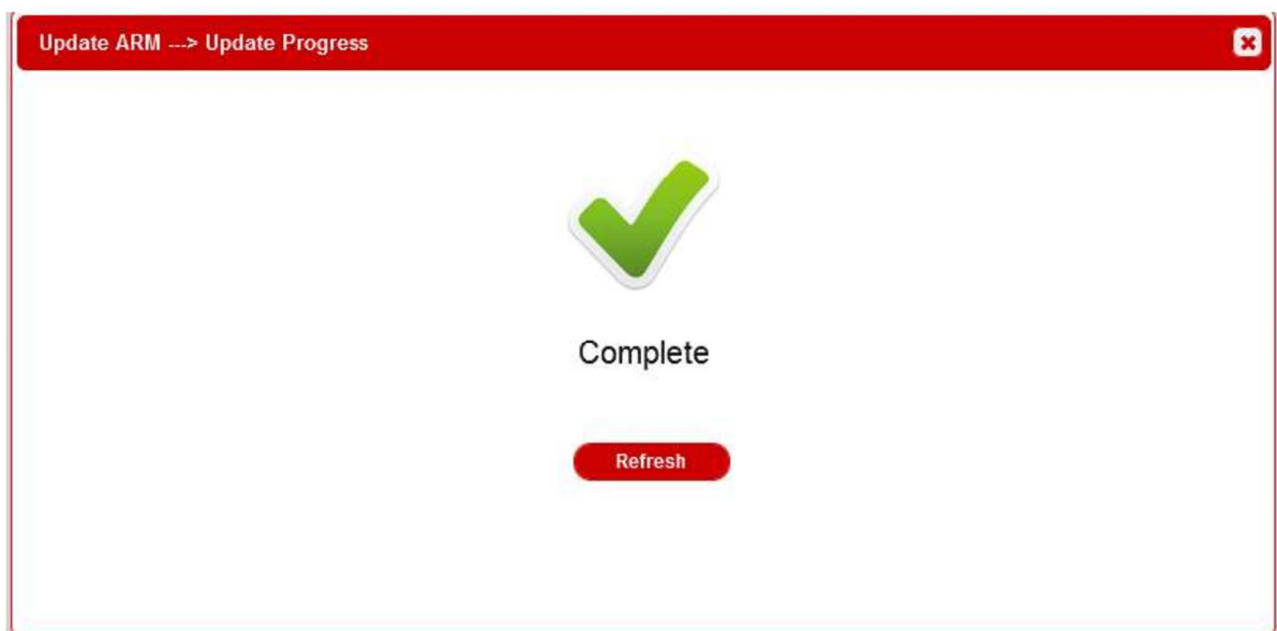

Update ARM --> Update Progress

Complete

Refresh

Step 9: Complete. Close this Window.

Step 10: reboot the device.

Step 11: Make sure that all DaisyNet are on the same Firmwareversion

Step 12: Do the quick setup again, by pressing the ShowMe Button for at least 10 seconds, see the Quickstart Guide for a detailed description

Note: Please clean the browser cache after the update, to avoid any problems.