


Skizze / Bild

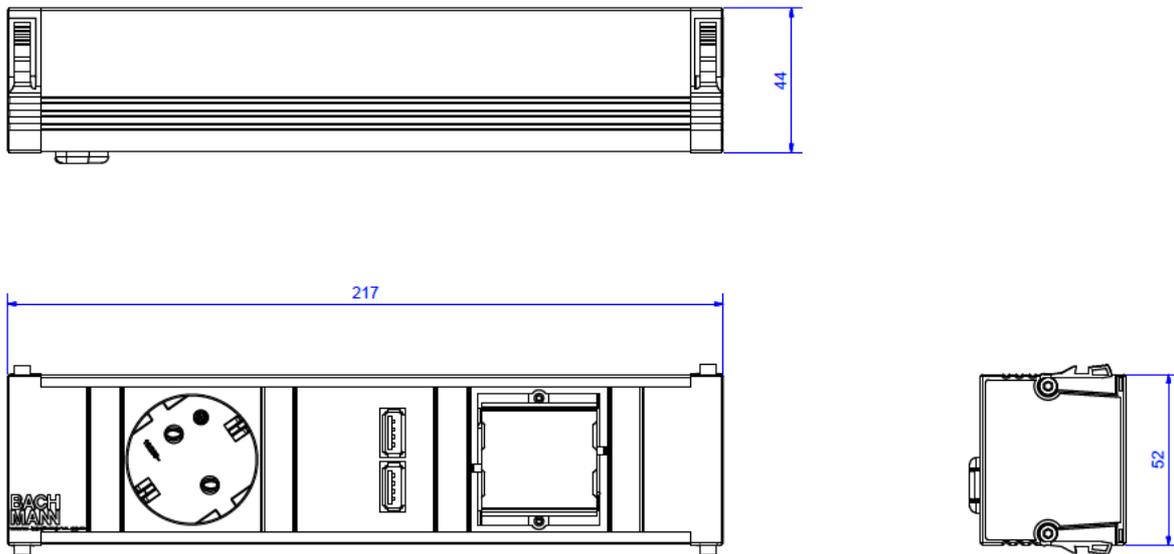

<p><b>Coni 1xSchuko 1xABD 1xUSB Doppelcharger mit 0,2m H05VV-F3G1,5mm<sup>2</sup> mit GST18i3 Steckverbinder</b></p> <p><b>Steckdosen:</b></p> <ul style="list-style-type: none"> <li>Nach IEC 60884, VDE 0620-1</li> <li>2-polig mit Schutzkontakt, mit Kinderschutz</li> <li>16A/3680W, AC250V, IP20, 35°</li> <li>schwarz</li> </ul> <p><b>USB Charger:</b></p> <ul style="list-style-type: none"> <li>3,1A / 5VDC</li> <li>Doppelcharger</li> </ul> <p><b>Custom Module:</b></p> <ul style="list-style-type: none"> <li>1x ABD für Custom Module</li> </ul> <p><b>Anschluss:</b></p> <ul style="list-style-type: none"> <li>Stromeingang 0,2m H05VV-F3G1,5mm<sup>2</sup> Leitung und GST18i3 Steckverbinder</li> </ul> <p><b>Profil:</b></p> <ul style="list-style-type: none"> <li>ALU eloxiert</li> </ul> <p><b>Kunststoff:</b></p> <ul style="list-style-type: none"> <li>PA 6 GF, schwarz, Glühdrahtprüfung bis 850°C</li> </ul> <p><b>Endkappen:</b></p> <ul style="list-style-type: none"> <li>Genietet, nicht wiederanschließbar</li> </ul> <p><b>Abmessungen</b> (Länge x Breite x Höhe) in mm:</p> <ul style="list-style-type: none"> <li>Gemäß Zeichnung</li> </ul> <p><b>Lieferform:</b></p> <ul style="list-style-type: none"> <li>Im Polybeutel verpackt</li> </ul> <p><b>Lieferumfang:</b></p> <ul style="list-style-type: none"> <li>1x Steckdoseneinheit Coni</li> </ul>	<p><b>Coni 1xSchuko 1xcover for Custom Modules with 0,2m H05VV-F3G1,5mm<sup>2</sup> with GST18i3 connector</b></p> <p><b>Sockets:</b></p> <ul style="list-style-type: none"> <li>According IEC 60884, VDE 0620-1</li> <li>2-pole with earthing contact, incl. child protection</li> <li>16A/3680W, AC250V, IP20, 35°</li> <li>Black</li> </ul> <p><b>USB Charger:</b></p> <ul style="list-style-type: none"> <li>3,1A / 5VDC</li> <li>Double charger</li> </ul> <p><b>Custom Module:</b></p> <ul style="list-style-type: none"> <li>1x cover for custom modules</li> </ul> <p><b>Connection:</b></p> <ul style="list-style-type: none"> <li>Power input 0,2m H05VV-F3G1,5mm<sup>2</sup> and GST18 plug</li> </ul> <p><b>Profile:</b></p> <ul style="list-style-type: none"> <li>aluminum anodized</li> </ul> <p><b>Plastic material:</b></p> <ul style="list-style-type: none"> <li>PA 6 GF, black, glow wire resistant up to 850°C</li> </ul> <p><b>Endcaps:</b></p> <ul style="list-style-type: none"> <li>With rivets, non rewirable</li> </ul> <p><b>Measurements</b> (length x width x height):</p> <ul style="list-style-type: none"> <li>According to drawing</li> </ul> <p><b>Packing:</b></p> <ul style="list-style-type: none"> <li>In polybag</li> </ul> <p><b>Extent of delivery:</b></p> <ul style="list-style-type: none"> <li>1x PDU CONI</li> </ul>
--	---