


AUTONOMIC

A  **Snap** COMPANY

KP-6 DESIGNER KEYPAD

Specifications

Bring designer elegance, simplicity and convenience to your Mirage Audio System with KP-6 in-wall accessory keypads, featuring eight tactile keys and LED indicators. Each keypad is interchangeable with standard Lutron Decora-style wall plates. With the touch of a button, control power and volume, and select different sources and presets for each room. Easily group zones with common presets for a more custom experience.

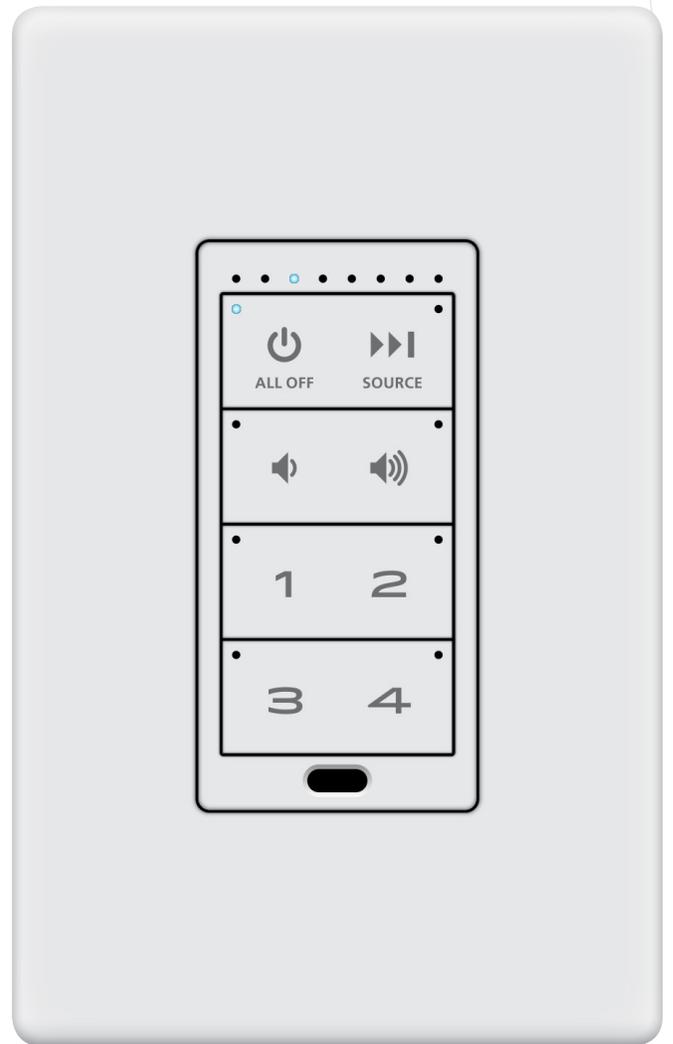

Available in White (KP-6) or Black (KP-6B)



MIRAGE
AUDIO SYSTEM

COMPLETE YOUR MIRAGE AUDIO SYSTEM

Connect up to 96 zones with the Mirage Media Server (models MMS-5A and MMS-2A) and Mirage Amplifiers (models M-800 and M-400), and enjoy the greatest content variety, quality and experience to be had from a whole-home audio system.

Complete your Mirage Audio System with exquisite sound quality, your choice of control integration and speakers, professionally installed with the level of sophistication your customers demand.



MMS-5A



MMS-2A



M-800



M-400

INTEGRATE ANY SERVICE WITH YOUR CONTROL SYSTEM



©2006–2017 Autonomic Controls, Inc. Autonomic, eAudioCast, and TuneBridge are registered trademarks of Autonomic Controls, Inc. All other trademarks are property of their respective owners. Specifications are based on current revision and may change without notice. +1 914 598 1647. 20170508

FEATURES


- Four user-programmable presets for every zone
- Controls include power, volume and source selection
- IR receiver and LED indicators
- Compatible with standard Lutron Decora-style faceplates
- Keypad Preset Grouping
- Available in Black (SKU MP-KP-6B)
- Euro conversion accessory kit available (SKU MP-KP-6EU)

SPECIFICATIONS

Operating voltage	12V DC ± 3V
Current draw	< 5mA
Wiring	Up to 300m of Cat5e (not included)
Connection	RJ45 plug
Mounting	Single-gang flush box (screws included)
Cover plate	Single-gang, white (included); Available in Black KP-6B
LED indicators	Volume bar, source, key press
IR indicators	IR received by the keypad is retransmitted by the IR port for the selected source
System Requirements	Mirage Amplifier (M-400 or M-800) firmware version 2.0 or greater Mirage Media Server (MMS-5A or MMS-2A) firmware version 5.2.19572.46 or greater
Class B Digital Device Compliance	FCC: Article 15 of the FCC rules CE: EN55022, EN55024, EN61000-3-3, EN61000-6-1, EN61000-6-3

DIMENSIONS

	KP-6	KP-6 EURO
Width x Height	2.95" x 4.70" (75mm x 119.5mm)	3.15" x 3.15" (80mm x 80mm)
Plate Depth	0.31" (7.9mm)	0.31" (7.9mm)
Mounting Depth	0.57" (14.5mm)	0.57" (14.5mm)
Wall cutout	1.77" x 2.95" (45mm x 75mm)	1.77" x 2.75" (45mm x 70mm)

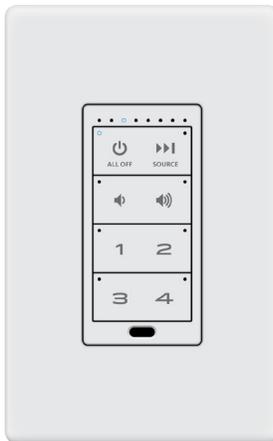

KP-6



KP-6B



KP-6 (REAR)