



Producer Overview

Origin Acoustics is the team that invented the architectural loudspeaker speaker category over thirty years ago. Today that same team is producing the finest in-ceiling and in-wall speakers available. These speakers represent patented, state-of-the-art technology that has resulted in unparalleled sound quality that blends seamlessly into any décor.

Carefully crafted with an impressive price to performance ratio, the Producer Collection is our entry-level offering that is anything but entry-level in sound quality. With five in-ceiling models there are a variety of options for any number of applications. The collection includes two dual-tweeter models producing stereo from a single speaker, a perfect solution for hallways, bathrooms and walk-in closets.



P60



P60 DT



P61



P80




P80 DT

Features

- **Polypropylene or Injection Molded Graphite (IMG) Woofers**
Light and strong, these drivers respond with speed and authority to deliver dynamic bass.
- **Butyl Rubber Surrounds**
More accurate woofer suspension with greater durability.
- **Silk and Aluminum Tweeters**
Accurately producing high frequencies with all of the detail and nuance necessary for today's high definition recordings.
- **Stereo Versions**
Featuring dual voice-coil woofers and dual tweeters to allow both stereo channels to be produced by the same speaker.

Specifications

	P60 Series	P80 Series
Diameter	8.75" (223mm)	10.75" (273mm)
Cutout Diameter	8" (202mm)	9.75" (247mm)
Mounting Depth	3.625" (92mm)	6.75" (170mm)

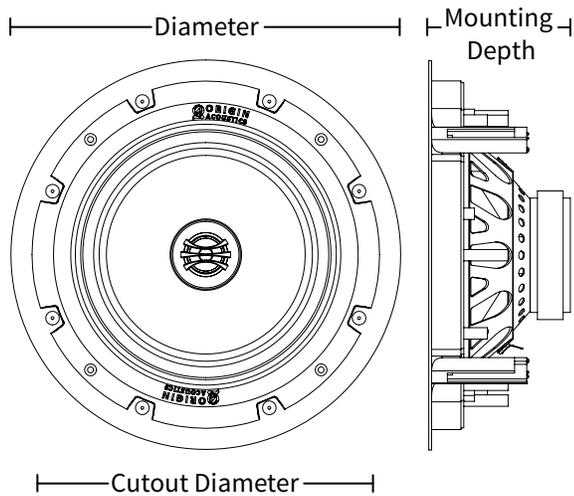

Model Number	P60	P60 DT	P61	P80	P80 DT
Part Number	SCD60100	SCD2T60400	SCD60150	SCD80100	SCD2T80100
Tweeter Dome	Silk	Silk	Aluminum	Silk	Silk
Tweeter Diameter	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)
Woofer Cone	Polypropylene	Polypropylene	IMPP	Polypropylene	Polypropylene
Woofer Diameter	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	8" (203mm)	8" (203mm)
Adjustments	N/A	N/A	N/A	N/A	N/A
Frequency Response	48Hz-20kHz	48Hz-20kHz	48Hz-20kHz	38Hz-20kHz	38Hz-20kHz
Impedance	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Power Handling	5-100 watts	5-100 watts	5-100 watts	5-100 watts	5-100 watts
Sensitivity	86dB ± 3dB	86dB ± 3dB	88dB ± 3dB	88dB ± 3dB	88dB ± 3dB

Accessories



For all warranty information, please refer to the Origin Acoustics website.

Due to continuous product improvement, all features and specifications are subject to change without notice. Please check www.originacoustics.com for up-to-date product information.

©2014 Origin Acoustics. All copyrighted, trademarked and patented elements mentioned herein are the sole property of Origin Acoustics.

www.originacoustics.com

