

Additions and/or changes:

1. Added frame configurations with 1 to 4 subs (WL115-sw) behind primary array. Note that 1 extension bar (EB2082-i) and 2 array frames (FB2082-i) are required for these configurations. See figure 1 for sample representation.

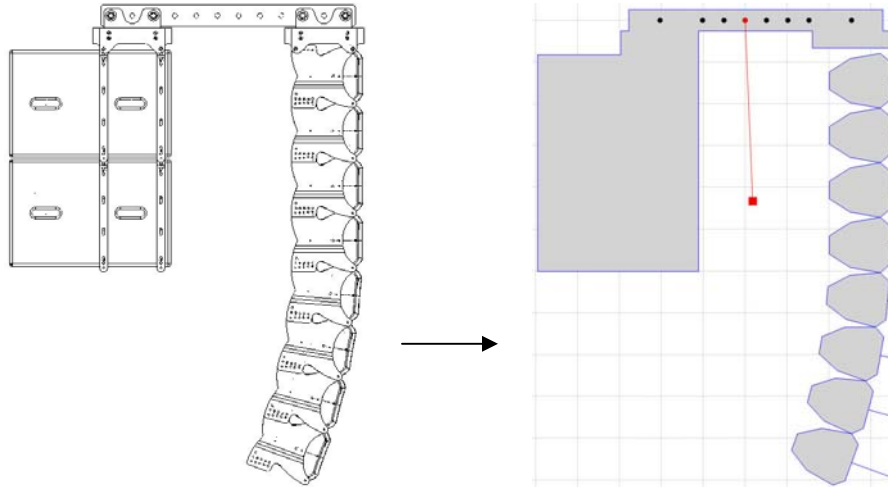


Figure 1 – Array shown with 2 subs behind primary array

2. Included updated Ease 4.0 data.
3. Updated ground stack speaker angle options (-10, 0 , +10 deg).
4. Added limit messages based on 7 to 1 design factors.
5. Added warning notes based on 10 to 1 design factors.