



Touch Screens

4K Ultra HD Input
Support for 4K @ 60hz through 3 HDMI 2.0 inputs

4K Display
Genuine 4K displays with 3840x2160 pixels resolution

Smart HDMI
The screen turns On/Off based on the HDMI signal


Touch
10 points Infrared touch with tempered glass

SWEDX 4K Touch Screens, 86" and 98"




| Features | Specifications | Model ID | |
|-------------|-------------------------|--|------------------------|
| | | SDST86K8-01 | SDST98K8-01 |
| Panel | Aspect Ratio | 16:9 | |
| | Panel Resolution | 3840 x 2160 pixels | |
| | Refresh Rate | 120 Hz | 120 Hz |
| | Static Contrast | 1200:1 | 1300:1 |
| | Brightness | 410 cd/m ² | 410 cd/m ² |
| | Response Time | 8 ms | |
| Environment | Viewing Angle | 178/178 | |
| | Lead Presence | Yes | |
| | Mercury | 0 mg | |
| Connections | Max Input Signal | 3840 x 2160 @ 60Hz | |
| | HDMI | 3 x HDMI (V. 2.0) (HDCP 2.2) 480P/480I/576P/576I/720P/1080I/1080P/2160p @ 60Hz | |
| | USB Media Player | 2 x USB 2.0 | |
| | VGA | 1 | |
| | VGA Audio In | 1 | |
| | Component | 1 | |
| Touch | AV | 1 | |
| | Digital Audio Interface | 1 (Coaxial) | |
| | Technology | USB | |
| Power | Points | Infrared | |
| | Protection Glass | 10 | |
| | Power Consumption | 280 W | 471 W |
| Speakers | Power Consumption STB | < 0.5 W | |
| | Energy Class | A+ | |
| | Power Supply | 100-240 V ~ 50/60Hz | |
| Vesa Mount | Audio Out | 4 x 10 W | 4 x 10 W |
| Dimensions | Dimensions | 600 x 400 and 600x600 mm | 800x600 and 800x800 mm |
| | Product (H x W x D) | 1959 x 1130 x 78 mm | 2221 x 1276 x 92 mm |
| Weight | Product | 85 kg | 120 kg |
| Dimension | Package (L x W x H) | 2112 x 1428 x 367 mm | 2377 x 1579 x 367 mm |
| Weight | Package | 150 kg | 237 kg |

Dimension 98"

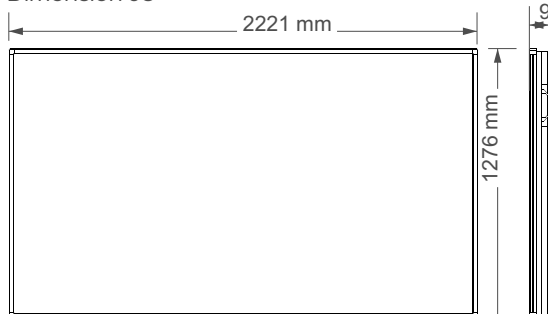

Dimension 86"

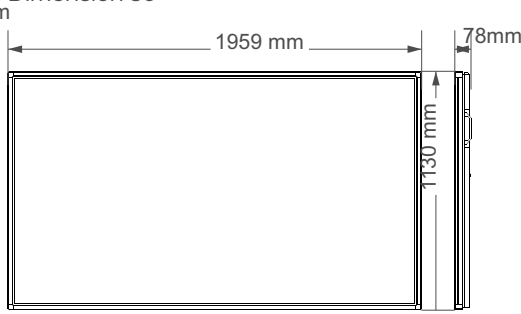

Each screen is packed in a heavy duty flight case for maximized protection

