



# RJ45 cables guide 2020

**exertis** | CONNECT

a **DCC** business


# Cables - RJ45 CAT. 5e U/UTP

## Unshielded patch cable CAT. 5e U/UTP copper



**CHARACTERISTICS**

- Category: CAT.5e
- Frequency: 100 MHz
- Impedance: 100 Ω
- Conductor: copper
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED
0.5 m	846050	846051	846052	846054	846053
1.0 m	846100	846101	846102	846104	846103
1.5 m	846015	846953	846952	846954	846951
2.0 m	846200	846201	846202	846204	846203
3.0 m	846300	846301	846302	846304	846303
5.0 m	846500	846501	846502	846504	846503
10.0 m	846105	846111	846112	846114	846113
15.0 m	846915	846961	846960	846962	846959
20.0 m	846920	846965	846964	846966	846963

## Unshielded patch cable CAT. 5e U/UTP



**CHARACTERISTICS**

- Category: CAT.5e
- Frequency: 100 MHz
- Impedance: 100 Ω
- Conductor: copper-coated aluminium
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801 compatible
- Sheath: PVC
- Packaging: separate packs




LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.15 m	857180	853910	853920	853930	853940	853950	853960
0.3 m	857190	853911	853921	853931	853941	853951	853961
0.5 m	857200	853912	853922	853932	853942	853952	853962
1.0 m	857210	853913	853923	853933	853943	853953	853963
2.0 m	857220	853914	853924	853934	853944	853954	853964
3.0 m	857230	853915	853925	853935	853945	853955	853965
5.0 m	857240	853916	853926	853936	853946	853956	853966
10.0 m	857250	853917	853927	853937	853947	853957	853967
15.0 m	857260	853918	853928	853938	853948	853958	853968
20.0 m	857270	853919	853929	853939	853949	853959	853969

## Unshielded patch Cable CAT. 5e U/UTP snagless copper



**CHARACTERISTICS**

- Category: CAT. 5e
- Kink protection hood for fixing clip
- Frequency: 100 MHz
- Impedance: 100 Ω
- Conductor: copper
- Cabling standard: ANSI/TIA 568C.2 – ISO 11801
- Sheath: PVC
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK
0.3 m	973000	973040	973030	973010	973020	973050
0.5 m	973001	973041	973031	973011	973021	973051
1.0 m	973002	973042	973032	973012	973022	973052
2.0 m	973003	973043	973033	973013	973023	973053
3.0 m	973004	973044	973034	973014	973024	973054
5.0 m	973005	973045	973035	973015	973025	973055
10.0 m	973006	973046	973036	973016	973026	973056
20.0 m	973007	973047	973037	973017	973027	973057


## Shielded patch cable CAT. 5e F/UTP copper

Copper quality in every colour!



### CHARACTERISTICS

- Category: CAT.5e
- Frequency: 100 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs

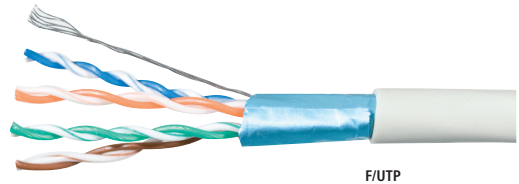

LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK
0.15 m	857800	857080	857060	857100	857040	857110
0.3 m	857130	857090	857070	857111	857050	857120
0.5 m	847050	847161	847162	847164	847163	847166
0.7 m	231300	231330	231340	231310	231320	231350
1.0 m	847100	847151	847152	847154	847153	847156
1.5 m	847015	847019	847018	847020	847017	847016
2.0 m	847200	847141	847142	847144	847143	847146
3.0 m	847300	847031	847032	847034	847033	847036
5.0 m	847500	847131	847132	847134	847133	847136
10.0 m	847101	847171	847172	847174	847173	847176
15.0 m	847915	847712	847711	847713	847710	234850
20.0 m	847920	847717	847716	847718	847715	234900


## Shielded patch cable CAT. 5e F/UTP

The most affordable option!



### CHARACTERISTICS

- Category: CAT.5e
- Frequency: 100 MHz
- Impedance: 100 Ω
- Conductor: copper-coated aluminium
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801 compatible
- Sheath: PVC
- Packaging: separate packs

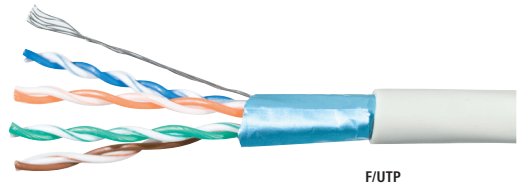

LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.15 m	857280	854101	854111	854121	854131	854141	854151
0.3 m	857290	854102	854112	854122	854132	854142	854152
0.5 m	857300	854103	854113	854123	854133	854143	854153
1.0 m	857310	854104	854114	854124	854134	854144	854154
2.0 m	857320	854105	854115	854125	854135	854145	854155
3.0 m	857330	854106	854116	854126	854136	854146	854156
5.0 m	857340	854107	854117	854127	854137	854147	854157
10.0 m	857350	854108	854118	854128	854138	854148	854158
20.0 m	857370	854110	854120	854130	854140	854150	854160

# Cables - RJ45 CAT. 5e F/UTP




## Shielded patch cable CAT. 5e F/UTP snagless copper

Protect your cable clips!



**CHARACTERISTICS**

- Category: CAT.5e
- Kink protection hood for locking clip
- Frequency: 100 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 – ISO 11801
- Sheath: PVC
- Packaging: separate packs

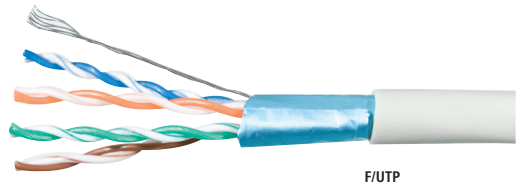

LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK
0.15 m	<b>851210</b>	-	-	-	-	-
0.3 m	<b>851211</b>	<b>973100</b>	<b>973090</b>	<b>973070</b>	<b>973080</b>	<b>973110</b>
0.5 m	<b>851212</b>	<b>973101</b>	<b>973091</b>	<b>973071</b>	<b>973081</b>	<b>973111</b>
0.7 m	<b>851213</b>	-	-	-	-	-
1.0 m	<b>851214</b>	<b>973102</b>	<b>973092</b>	<b>973072</b>	<b>973082</b>	<b>973112</b>
1.5 m	<b>851215</b>	-	-	-	-	-
2.0 m	<b>851216</b>	<b>973103</b>	<b>973093</b>	<b>973073</b>	<b>973083</b>	<b>973113</b>
3.0 m	<b>851217</b>	<b>973104</b>	<b>973094</b>	<b>973074</b>	<b>973084</b>	<b>973114</b>
5.0 m	<b>851218</b>	<b>973105</b>	<b>973095</b>	<b>973075</b>	<b>973085</b>	<b>973115</b>
7.0 m	<b>851219</b>	-	-	-	-	-
10.0 m	<b>851220</b>	<b>973106</b>	<b>973096</b>	<b>973076</b>	<b>973086</b>	<b>973116</b>
15.0 m	<b>851221</b>	-	-	-	-	-
20.0 m	<b>851222</b>	<b>973107</b>	<b>973097</b>	<b>973077</b>	<b>973087</b>	<b>973117</b>
25.0 m	<b>851223</b>	-	-	-	-	-
30.0 m	<b>851224</b>	-	-	-	-	-

## Shielded patch Cable right-angled down CAT. 5e F/UTP copper



**CHARACTERISTICS**

- Category: CAT.5e
- Connector: right-angled down at both ends
- Frequency: 100 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs



	LENGTH	REF.
Shielded patch cable right-angled down	0.3 m	<b>854275</b>
Shielded patch cable right-angled down	0.7 m	<b>854276</b>
Shielded patch cable right-angled down	1.0 m	<b>854277</b>
Shielded patch cable right-angled down	2.0 m	<b>854278</b>
Shielded patch cable right-angled down	3.0 m	<b>854279</b>

REF. 854276

## Unshielded patch cable CAT. 6 U/UTP copper

Copper quality in every colour!



### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs



U/UTP



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.5 m	848050	245700	244700	246700	243700	246771	246782
1.0 m	848100	245710	244710	246710	243710	246772	246783
1.5 m	240960	245740	244740	246740	243740	246773	246784
2.0 m	848200	245720	244720	246720	243720	246774	246785
3.0 m	848300	245730	244730	246730	243730	246775	246786
5.0 m	848500	245750	244750	246750	243750	246776	246787
7.0 m	240670	245770	244770	246770	243770	246777	246788
10.0 m	848101	245760	244760	246760	243760	246778	246789
15.0 m	848915	245761	244761	246761	243761	246779	246790
20.0 m	848920	245762	244762	246762	243762	246780	246791
25.0 m	240850	245763	244763	246763	243763	246781	246792
30.0 m	848930	-	-	-	-	-	-
50.0 m	240950	-	-	-	-	-	-

## Unshielded patch cable CAT. 6 U/UTP

The most affordable option!



### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper-coated aluminium
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801 compatible
- Sheath: PVC
- Packaging: separate packs



U/UTP



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.15 m	854180	854190	854200	854210	854220	854230	854240
0.3 m	854181	854191	854201	854211	854221	854231	854241
0.5 m	854182	854192	854202	854212	854222	854232	854242
1.0 m	854183	854193	854203	854213	854223	854233	854243
2.0 m	854184	854194	854204	854214	854224	854234	854244
3.0 m	854185	854195	854205	854215	854225	854235	854245
5.0 m	854186	854196	854206	854216	854226	854236	854246
10.0 m	854187	854197	854207	854217	854227	854237	854247
15.0 m	854188	854198	854208	854218	854228	854238	854248
20.0 m	854189	854199	854209	854219	854229	854239	854249

# Cables - RJ45 CAT. 6 U/UTP - U/FTP

## Unshielded patch cable CAT. 6 U/UTP crossover




### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs



LENGTH	GREY
0.5 m	<b>855940</b>
1.0 m	<b>855941</b>
1.5 m	<b>855942</b>
2.0 m	<b>855943</b>
3.0 m	<b>855944</b>
5.0 m	<b>855945</b>
10.0 m	<b>855946</b>
15.0 m	<b>855947</b>
20.0 m	<b>855948</b>



## Dexlan

## Unshielded patch cable CAT. 6 U/UTP snagless LSZH



### CHARACTERISTICS

- Category: CAT. 6
- Kink protection hood for fixing clip
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: LSZH (zero halogen)
- Packaging: separate packs

LENGTH	GREY
0.5 m	<b>848864</b>
1.0 m	<b>848865</b>
1.5 m	<b>848866</b>
2.0 m	<b>848867</b>
3.0 m	<b>848868</b>
5.0 m	<b>848869</b>
10.0 m	<b>848870</b>
20.0 m	<b>848871</b>



## Shielded patch cable CAT. 6 U/FTP flat

Slide your cables under doors and carpets!



### CHARACTERISTICS

- Category: CAT. 6
- Kink protection hood for fixing clip
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: pair per pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC, 2 mm thick
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.5 m	<b>845170</b>	<b>845178</b>	<b>845186</b>	<b>845194</b>	<b>845202</b>	<b>845210</b>	<b>845055</b>
1.0 m	<b>845171</b>	<b>845179</b>	<b>845187</b>	<b>845195</b>	<b>845203</b>	<b>845211</b>	<b>845056</b>
2.0 m	<b>845172</b>	<b>845180</b>	<b>845188</b>	<b>845196</b>	<b>845204</b>	<b>845212</b>	<b>845057</b>
3.0 m	<b>845173</b>	<b>845181</b>	<b>845189</b>	<b>845197</b>	<b>845205</b>	<b>845213</b>	<b>845058</b>
5.0 m	<b>845174</b>	<b>845182</b>	<b>845190</b>	<b>845198</b>	<b>845206</b>	<b>845214</b>	<b>845059</b>
7.5 m	<b>845175</b>	<b>845183</b>	<b>845191</b>	<b>845199</b>	<b>845207</b>	<b>845215</b>	<b>845060</b>
10.0 m	<b>845176</b>	<b>845184</b>	<b>845192</b>	<b>845200</b>	<b>845208</b>	<b>845216</b>	<b>845061</b>
20.0 m	<b>845177</b>	<b>845185</b>	<b>845193</b>	<b>845201</b>	<b>845209</b>	<b>845217</b>	<b>845063</b>



## Retractable shielded snagless patch cord panel CAT. 6 U/FTP



Allows fast and careful patching, with the exact length of cord required; and 10x faster maintenance than traditional patching. Rapid deployment of patching racks, careful presentation of patching, easy identification, optimized air flow, and space saving in racks.

### CHARACTERISTICS

- Category: flat PVC CAT. 6 U/FTP (100% ISO 11801 Fluke certified)
- Type: rackable 19"
- Height: 1U
- Depth: 600 mm (Plus +) or 365 mm (Plus 365)
- Equipped panel with 24 removable cassettes (1 cable per cassette)
- Several length available : 1.70 m (standard), 2.70 m (long range) or 0.80 m (Plus 365)
- Up to 8 colors available on demand



	REF.
Patchbox(R) Plus+ with 24 CAT. 6 U/FTP white cables, 1.70 m	<b>258167</b>
Patchbox(R) Plus 365 with 24 CAT. 6 U/FTP grey cables, 0.80 m	<b>258162</b>
Patchbox(R) Plus panel + empty to be equipped with cassettes	<b>258163</b>
Set of 3 cassettes with CAT. 6 U/FTP grey long range cables 2.70 m	<b>258164</b>




## Shielded patch cable CAT. 6 F/UTP copper

Copper quality in every colour!



### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs

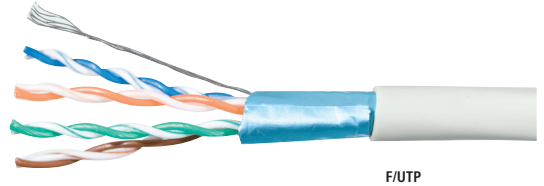

LENGTH	GREY	YELLOW	GREEN	BLUE	RED	ORANGE	PURPLE	BLACK	WHITE
0.5 m	842050	842051	842052	842054	842053	234100	234160	234220	853810
1.0 m	842100	842101	842102	842104	842103	234110	234170	234230	853811
1.5 m	857900	857930	857920	857940	857910	857941	857942	857943	853812
2.0 m	842200	842201	842202	842204	842203	234120	234180	234240	853813
3.0 m	842300	842301	842302	842304	842303	234130	234190	234250	853814
5.0 m	842500	842501	842502	842504	842503	234140	234200	234260	853815
7.0 m	240070	245570	244570	246570	243570	857950	857951	857952	857953
10.0 m	842105	245560	244560	246560	243560	857960	857961	857962	853816
15.0 m	842915	853331	853328	853334	853325	853337	853340	234270	853817
20.0 m	842920	853332	853329	853335	853326	853338	853341	234280	853818
25.0 m	240250	853333	853330	853336	853327	853339	853342	234290	853819
30.0 m	842930	853345	853344	853346	853343	853347	853348	853349	853350
50.0 m	240500	853353	853352	853354	853351	853355	853356	853357	853358


## Shielded patch cable CAT. 6 F/UTP

The most affordable option!



### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper-coated aluminium
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801 compatible
- Sheath: PVC
- Packaging: separate packs

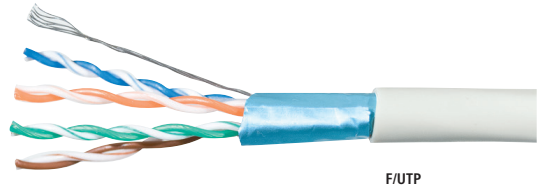

LENGTH	GREY	YELLOW	GREEN	BLUE	RED	ORANGE	PURPLE	BLACK	WHITE
0.15 m	852510	852520	852530	852540	852550			852560	852570
0.3 m	852511	852521	852531	852541	852551			852561	852571
0.5 m	852512	852522	852532	852542	852552			852562	852572
1.0 m	852513	852523	852533	852543	852553			852563	852573
2.0 m	852514	852524	852534	852544	852554			852564	852574
3.0 m	852515	852525	852535	852545	852555			852565	852575
5.0 m	852516	852526	852536	852546	852556			852566	852576
7.0 m	852601	852610	852620	852630	852640			852650	852660
10.0 m	852602	852611	852621	852631	852641			852651	852661
15.0 m	852603	852612	852622	852632	852642			852652	852662
20.0 m	852604	852613	852623	852633	852643			852653	852663
25.0 m	852605	852614	852624	852634	852644			852654	852664
30.0 m	852606	852615	852625	852635	852645			852655	852665
50.0 m	852607	852616	852626	852636	852646			852656	852666


# Cables - RJ45 CAT. 6 F/UTP

## Shielded patch cable CAT. 6 F/UTP snagless LSZH

**Protect your cable clips!**

**CHARACTERISTICS**

- Category: CAT. 6
- Kink protection hood for fixing clip
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: LSZH (zero halogen)
- Packaging: separate packs

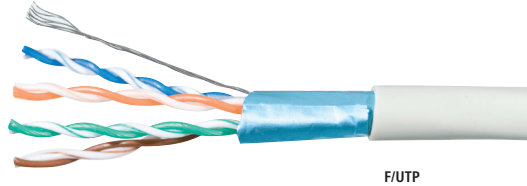

F/UTP



**PRACTICAL!**  
Kink protection hood for fixing clip




LENGTH	GREY	YELLOW	GREEN	BLUE	RED	ORANGE	PURPLE	PINK	BLACK	WHITE
0.3 m	850802	850816	850829	850845	850860	854420	854409	854431	850872	850882
0.5 m	850803	850817	850830	850846	850861	854421	854410	854432	850873	850883
1.0 m	850804	850818	850831	850847	850862	854422	854411	854433	850874	850884
2.0 m	850805	850819	850832	850848	850863	854423	854412	854434	850875	850885
3.0 m	850806	850820	850833	850849	850864	854424	854413	854435	850876	850886
5.0 m	850807	850821	850834	850850	850865	854425	854414	854436	850877	850887
10.0 m	850808	850822	850835	850851	850866	854426	854415	854437	850878	850888
15.0 m	850809	850823	850836	850852	850867	854427	854416	854438	850879	850889
20.0 m	850810	850824	850837	850853	850868	854428	854417	854439	850880	850890
25.0 m	854395	854397	854399	854401	854403	854429	854418	854440	854405	854407
30.0 m	854396	854398	854400	854402	854404	854430	854419	854441	854406	854408

## Shielded patch cable CAT. 6 F/UTP outdoor

**Connect your equipment outside!**

**CHARACTERISTICS**

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC + PE (anti-UV polyethylene)
- Packaging: separate packs

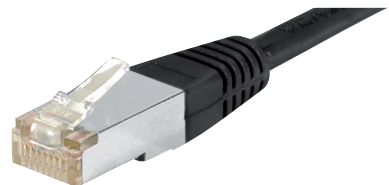

LENGTH	REF.
0.5 m	845038
1.0 m	845039
2.0 m	845040
3.0 m	845041
5.0 m	845042
7.5 m	845043
10.0 m	845044
15.0 m	845045
20.0 m	845046
25.0 m	845047
30.0 m	845048
40.0 m	845049
50.0 m	845050



F/UTP

**PRACTICAL!**  
Connect your cameras,  
your WiFi terminals  
and your industrial switches





## Shielded patch cable CAT. 6 S/FTP

### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	ORANGE	PURPLE	PINK	BLACK	WHITE
0.15 m	856810	856813	856812	856814	856811	854463	854450	854476	856816	856815
0.3 m	856819	856822	856821	856823	856820	854464	854451	854477	856825	856824
0.5 m	856828	856831	856830	856832	856829	854465	854452	854478	856834	856833
0.7 m	856837	856840	856839	856841	856838	854466	854453	854479	856843	856842
1.0 m	856846	856849	856848	856850	856847	854467	854454	854480	856852	856851
1.5 m	856855	856858	856857	856859	856856	854468	854455	854481	856861	856860
2.0 m	856864	856867	856866	856868	856865	854469	854456	854482	856870	856869
3.0 m	856873	856876	856875	856877	856874	854470	854457	854483	856879	856878
5.0 m	856882	856885	856884	856886	856883	854471	854458	854484	856888	856887
10.0 m	856891	856894	856893	856895	856892	854472	854459	854485	856897	856896
15.0 m	856900	856921	856920	856922	856919	854473	854460	854486	856924	856923
20.0 m	856909	856927	856926	856928	856925	854474	854461	854487	856930	856929
30.0 m	856918	856933	856932	856934	856931	854475	854462	854488	856936	856935
40.0 m	856910	-	-	-	-	-	-	-	-	-
50.0 m	856911	-	-	-	-	-	-	-	-	-
70.0 m	856912	-	-	-	-	-	-	-	-	-
90.0 m	856913	-	-	-	-	-	-	-	-	-

## Shielded patch cable CAT. 6 S/FTP lockable



### Secure your network links!

#### CHARACTERISTICS


- Category: CAT. 6
- Compatibility: any RJ45 jack
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC
- Packaging: separate packs
- Unlocking key: sold separately

## Lock for RJ45 port

### Secure your network connections!

#### CHARACTERISTICS

- Adapts to all RJ45 plugs
- Compatible with high density patch panels
- Unlocking key sold separately
- Packaging: bag of 10 locks

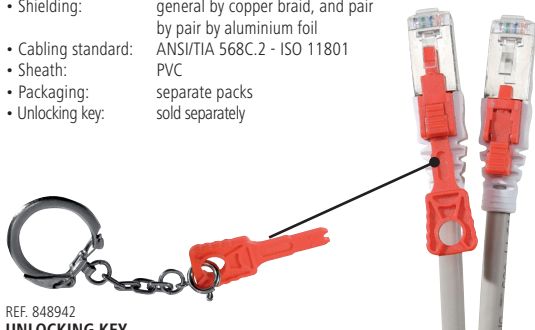

REF. 848942  
UNLOCKING KEY

LENGTH	REF.	
CAT. 6 S/FTP patch Cable	0.5 m	848935
CAT. 6 S/FTP patch Cable	1.0 m	848936
CAT. 6 S/FTP patch Cable	2.0 m	848937
CAT. 6 S/FTP patch Cable	3.0 m	848938
CAT. 6 S/FTP patch Cable	5.0 m	848939
ACCESSORY		
Unlocking key	-	848942



REF. 848942  
UNLOCKING KEY

REF. 848943



	REF.
10 locks for RJ45 connector	848943
Unlocking key	848942

# Cables - RJ45 CAT. 6 S/FTP



## Shielded patch Cable

### CAT. 6 S/FTP crossover



#### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: PVC

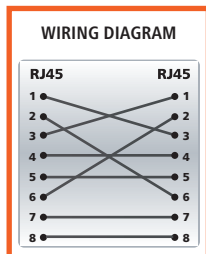

LENGTH	GREY	RED
0.5 m	<b>855950</b>	<b>854265</b>
1.0 m	<b>855951</b>	<b>854266</b>
1.5 m	<b>855952</b>	-
2.0 m	<b>855953</b>	<b>854267</b>
3.0 m	<b>855954</b>	<b>854268</b>
5.0 m	<b>855955</b>	<b>854269</b>
10.0 m	<b>855956</b>	<b>854270</b>
15.0 m	<b>855957</b>	-
20.0 m	<b>855958</b>	-

## Shielded patch Cable

### CAT. 6 S/FTP snagless LSZH



#### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: LSZH (zero halogen)
- Packaging: separate packs



LENGTH	GREY
0.5 m	<b>857160</b>
1.0 m	<b>857161</b>
2.0 m	<b>857162</b>
3.0 m	<b>857163</b>
5.0 m	<b>857164</b>
10.0 m	<b>857165</b>
15.0 m	<b>857166</b>
20.0 m	<b>857167</b>



## Shielded patch Cable

### CAT. 6 S/FTP snagless VoIP Special voice over IP patch cable!



#### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 ISO 11801
- Sheath: PVC
- Packaging: separate packs
- Specially designed for VoIP applications



LENGTH	BLACK
1.0 m	<b>851350</b>
2.0 m	<b>851351</b>
3.0 m	<b>851352</b>
6.0 m	<b>851353</b>
10.0 m	<b>851354</b>



## Shielded patch Cable

### CAT. 6 S/FTP snagless PoE Special PoE / PoE+ patch cable!



#### CHARACTERISTICS

- Category: CAT. 6
- Frequency: 250 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: LSZH (zero halogen)
- Specially designed for PoE / PoE+ applications



LENGTH	GREY
1.0 m	<b>851300</b>
2.0 m	<b>851301</b>
5.0 m	<b>851302</b>
10.0 m	<b>851303</b>
15.0 m	<b>851304</b>
20.0 m	<b>851305</b>



# Cables - RJ45 CAT. 6A U/UTP - F/UTP - S/FTP

## Unshielded patch Cable

### CAT. 6A U/UTP snagless



#### CHARACTERISTICS

- Category: CAT. 6A
- Kink protection hood for fixing clip
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Cabling standard: ANSI/TIA 568C.2
- Sheath: PVC
- Packaging: separate packs



LENGTH	GREY
0.5 m	<b>859450</b>
1.0 m	<b>859451</b>
2.0 m	<b>859452</b>
3.0 m	<b>859453</b>
5.0 m	<b>859454</b>
10.0 m	<b>859455</b>
15.0 m	<b>859456</b>
20.0 m	<b>859457</b>

## Shielded patch Cable

### Right-angled down CAT. 6A S/FTP



#### CHARACTERISTICS

- Category: CAT. 6A
- Connector: right-angled down at both ends
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 – ISO 11801
- Sheath: PVC
- Packaging: separate packs



LENGTH	GREY
0.3 m	<b>854286</b>
0.7 m	<b>854287</b>
1.0 m	<b>854288</b>
2.0 m	<b>854289</b>
3.0 m	<b>854290</b>


## Dexlan

### Shielded patch cable CAT. 6A F/UTP



#### CHARACTERISTICS

- Category: CAT. 6A
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2
- Sheath: PVC
- Packaging: separate packs

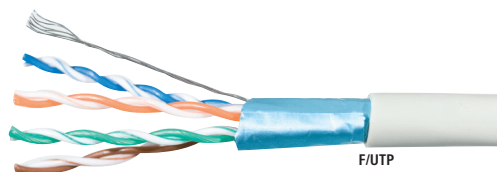

LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.15 m	<b>859500</b>	<b>859560</b>	<b>859545</b>	<b>859515</b>	<b>859530</b>	<b>850011</b>	<b>859575</b>
0.3 m	<b>859501</b>	<b>859561</b>	<b>859546</b>	<b>859516</b>	<b>859531</b>	<b>850012</b>	<b>859576</b>
0.5 m	<b>859502</b>	<b>859562</b>	<b>859547</b>	<b>859517</b>	<b>859532</b>	<b>850013</b>	<b>859577</b>
1.0 m	<b>859503</b>	<b>859563</b>	<b>859548</b>	<b>859518</b>	<b>859533</b>	<b>850014</b>	<b>859578</b>
1.5 m	<b>859504</b>	<b>859564</b>	<b>859549</b>	<b>859519</b>	<b>859534</b>	<b>850015</b>	<b>859579</b>
2.0 m	<b>859505</b>	<b>859565</b>	<b>859550</b>	<b>859520</b>	<b>859535</b>	<b>850016</b>	<b>859580</b>
3.0 m	<b>859506</b>	<b>859566</b>	<b>859551</b>	<b>859521</b>	<b>859536</b>	<b>850017</b>	<b>859581</b>
5.0 m	<b>859507</b>	<b>859567</b>	<b>859552</b>	<b>859522</b>	<b>859537</b>	<b>850018</b>	<b>859582</b>
7.5 m	<b>859508</b>	<b>859568</b>	<b>859553</b>	<b>859523</b>	<b>859538</b>	<b>850019</b>	<b>859583</b>
10.0 m	<b>859509</b>	<b>859569</b>	<b>859554</b>	<b>859524</b>	<b>859539</b>	<b>850020</b>	<b>859584</b>
15.0 m	<b>859510</b>	<b>859570</b>	<b>859555</b>	<b>859525</b>	<b>859540</b>	<b>850021</b>	<b>859585</b>
20.0 m	<b>859511</b>	<b>859571</b>	<b>859556</b>	<b>859526</b>	<b>859541</b>	<b>850022</b>	<b>859586</b>
25.0 m	<b>859512</b>	<b>859572</b>	<b>859557</b>	<b>859527</b>	<b>859542</b>	<b>850023</b>	<b>859587</b>
30.0 m	<b>859513</b>	-	-	-	-	-	-


# Cables - RJ45 CAT. 6A F/UTP - S/FTP

## Shielded patch cable CAT. 6A F/UTP snagless LSZH



### CHARACTERISTICS

- Category: CAT. 6A
- Kink protection hood for fixing clip
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: collectively shielded with aluminium foil
- Cabling standard: ANSI/TIA 568C.2
- Sheath: LSZH (zero halogen)
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	ORANGE	PURPLE	PINK	BLACK	WHITE
0.15 m	850310	850362	850349	850323	850336	854330	854314	854346	850388	850375
0.3 m	850311	850363	850350	850324	850337	854331	854315	854347	850389	850376
0.5 m	850312	850364	850351	850325	850338	854332	854316	854348	850390	850377
1.0 m	850313	850365	850352	850326	850339	854333	854317	854349	850391	850378
1.5 m	850314	850366	850353	850327	850340	854334	854318	854350	850392	850379
2.0 m	850315	850367	850354	850328	850341	854335	854319	854351	850393	850380
3.0 m	850316	850368	850355	850329	850342	854336	854320	854352	850394	850381
5.0 m	850317	850369	850356	850330	850343	854337	854321	854353	850395	850382
7.5 m	850318	850370	850357	850331	850344	854338	854322	854354	850396	850383
10.0 m	850319	850371	850358	850332	850345	854339	854323	854355	850397	850384
15.0 m	850320	850372	850359	850333	850346	854340	854324	854356	850398	850385
20.0 m	850321	850373	850360	850334	850347	854341	854325	854357	850399	850386
25.0 m	850322	850374	850361	850335	850348	854342	854326	854358	850400	850387
30.0 m	854311	-	-	-	-	-	-	-	-	-
40.0 m	854312	-	-	-	-	-	-	-	-	-
50.0 m	854313	-	-	-	-	-	-	-	-	-

## Dexlan

## Shielded patch cable CAT. 6A S/FTP



### CHARACTERISTICS

- Category: CAT. 6A
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2
- Sheath: PVC
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.5 m	857700	858330	858345	858315	858301	858375	858360
1.0 m	857710	858331	858346	858316	858302	858376	858361
1.5 m	857715	858332	858347	858317	858303	858377	858362
2.0 m	857720	858333	858348	858318	858304	858378	858363
3.0 m	857730	858334	858349	858319	858305	858379	858364
5.0 m	857740	858335	858350	858320	858306	858380	858365
7.5 m	857750	858336	858351	858321	858307	858381	858366
10.0 m	857760	858337	858352	858322	858308	858382	858367
15.0 m	857770	858338	858353	858323	858309	858383	858368
20.0 m	857780	858339	858354	858324	858310	858384	858369
25.0 m	857790	858340	858355	858325	858311	858385	858370
30.0 m	857791	-	-	-	-	-	-
40.0 m	857792	-	-	-	-	-	-
50.0 m	857793	-	-	-	-	-	-
70.0 m	857794	-	-	-	-	-	-
90.0 m	857795	-	-	-	-	-	-

## Dexlan

### Shielded patch cable CAT. 6A S/FTP snagless LSZH



#### CHARACTERISTICS

- Category: CAT. 6A
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2
- Sheath: LSZH (zero halogen)
- Packaging: separate packs



S/FTP



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	ORANGE	PURPLE	PINK	BLACK	WHITE
0.15 m	<b>858401</b>	<b>858417</b>	<b>858433</b>	<b>858449</b>	<b>858465</b>	<b>858529</b>	<b>858513</b>	<b>854373</b>	<b>858481</b>	<b>858497</b>
0.3 m	<b>858402</b>	<b>858418</b>	<b>858434</b>	<b>858450</b>	<b>858466</b>	<b>858530</b>	<b>858514</b>	<b>854374</b>	<b>858482</b>	<b>858498</b>
0.5 m	<b>858403</b>	<b>858419</b>	<b>858435</b>	<b>858451</b>	<b>858467</b>	<b>858531</b>	<b>858515</b>	<b>854375</b>	<b>858483</b>	<b>858499</b>
1.0 m	<b>858404</b>	<b>858420</b>	<b>858436</b>	<b>858452</b>	<b>858468</b>	<b>858532</b>	<b>858516</b>	<b>854376</b>	<b>858484</b>	<b>858500</b>
1.5 m	<b>858405</b>	<b>858421</b>	<b>858437</b>	<b>858453</b>	<b>858469</b>	<b>858533</b>	<b>858517</b>	<b>854377</b>	<b>858485</b>	<b>858501</b>
2.0 m	<b>858406</b>	<b>858422</b>	<b>858438</b>	<b>858454</b>	<b>858470</b>	<b>858534</b>	<b>858518</b>	<b>854378</b>	<b>858486</b>	<b>858502</b>
3.0 m	<b>858407</b>	<b>858423</b>	<b>858439</b>	<b>858455</b>	<b>858471</b>	<b>858535</b>	<b>858519</b>	<b>854379</b>	<b>858487</b>	<b>858503</b>
5.0 m	<b>858408</b>	<b>858424</b>	<b>858440</b>	<b>858456</b>	<b>858472</b>	<b>858536</b>	<b>858520</b>	<b>854380</b>	<b>858488</b>	<b>858504</b>
7.5 m	<b>858409</b>	<b>858425</b>	<b>858441</b>	<b>858457</b>	<b>858473</b>	<b>858537</b>	<b>858521</b>	<b>854381</b>	<b>858489</b>	<b>858505</b>
10.0 m	<b>858410</b>	<b>858426</b>	<b>858442</b>	<b>858458</b>	<b>858474</b>	<b>858538</b>	<b>858522</b>	<b>854382</b>	<b>858490</b>	<b>858506</b>
15.0 m	<b>858411</b>	<b>858427</b>	<b>858443</b>	<b>858459</b>	<b>858475</b>	<b>858539</b>	<b>858523</b>	<b>854383</b>	<b>858491</b>	<b>858507</b>
20.0 m	<b>858412</b>	<b>858428</b>	<b>858444</b>	<b>858460</b>	<b>858476</b>	<b>858540</b>	<b>858524</b>	<b>854384</b>	<b>858492</b>	<b>858508</b>
25.0 m	<b>858413</b>	<b>858429</b>	<b>858445</b>	<b>858461</b>	<b>858477</b>	<b>858541</b>	<b>858525</b>	<b>854385</b>	<b>858493</b>	<b>858509</b>
30.0 m	<b>854370</b>	-	-	-	-	-	-	-	-	-
40.0 m	<b>854371</b>	-	-	-	-	-	-	-	-	-
50.0 m	<b>854372</b>	-	-	-	-	-	-	-	-	-


### Shielded patch Cable CAT. 6A S/FTP lockable

Impossible to unplug your cables without the key!



#### CHARACTERISTICS

- Category: CAT. 6A
- Compatibility: any RJ45 jack
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2
- Sheath: PVC
- Packaging: separate packs
- Unlocking key: sold separately

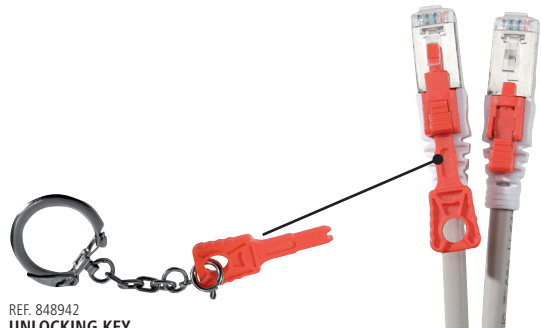

REF. 848942  
UNLOCKING KEY

	LENGTH	REF.
Patch cable CAT. 6A S/FTP	0.5 m	<b>848944</b>
Patch cable CAT. 6A S/FTP	1.0 m	<b>848945</b>
Patch cable CAT. 6A S/FTP	2.0 m	<b>848946</b>
Patch cable CAT. 6A S/FTP	3.0 m	<b>848947</b>
Patch cable CAT. 6A S/FTP	5.0 m	<b>848948</b>
ACCESSORY		
Unlocking key	-	<b>848942</b>

# Cables - RJ45 CAT. 6A S/FTP

## Dexlan

### Ultra thin shielded patch cable CAT. 6A S/FTP Up to 40% space saving compared to a traditional patch cord!



#### CHARACTERISTICS

- Category: CAT. 6A
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cable outer diameter : 4.8mm
- Cabling standard: ANSI/TIA 568C.2 - ISO 11801
- Sheath: LSZH
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.3 m	858700	858707	858714	858721	858728	858735	858742
0.5 m	858701	858708	858715	858722	858729	858736	858743
1.0 m	858702	858709	858716	858723	858730	858737	858744
2.0 m	858703	858710	858717	858724	858731	858738	858745
3.0 m	858704	858711	858718	858725	858732	858739	858746
5.0 m	858705	858712	858719	858726	858733	858740	858747
10.0 m	858706	858713	858720	858727	858734	858741	858748

### Shielded patch Cable CAT. 6A S/FTP PUR

The only cable for industrial applications that resists oil splashes and abrasion!



#### CHARACTERISTICS

- Category: CAT. 6A
- Frequency: 500 MHz
- Impedance: 100 Ω
- Conductor: copper
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2 – ISO 11801
- Sheath: LS-PUR (Low Smoke Polyurethane)
- Packaging: separate packs



LENGTH	GREEN
1.0 m	854295
2.0 m	854296
3.0 m	854297
5.0 m	854298
10.0 m	854299



**PRACTICAL!**  
Flexible cable that withstands wear and harsh conditions

## Dexlan

### Shielded patch Cable on cable CAT. 7 S/FTP snagless LSZH High-performance patch cable!



#### CHARACTERISTICS

- Category: CAT. 6<sub>A</sub> Class E<sub>A</sub> on cable CAT. 7
- Frequency: 600 MHz
- Impedance: 100 Ω
- Conductor: copper
- Connector: shielded 8P8C RJ45
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2– ISO 11801
- Sheath: LSZH (zero halogen)
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK	WHITE
0.5 m	858600	858608	858616	858624	858632	858648	858640
1.0 m	858601	858609	858617	858625	858633	858649	858641
1.5 m	858602	858610	858618	858626	858634	858650	858642
2.0 m	858603	858611	858619	858627	858635	858651	858643
3.0 m	858604	858612	858620	858628	858636	858652	858644
5.0 m	858605	858613	858621	858629	858637	858653	858645
10.0 m	858606	858614	858622	858630	858638	858654	858646
20.0 m	858607	858615	858623	858631	858639	858655	858647

### Shielded patch Cable on cable CAT. 7 S/FTP snagless LSZH Patch cable assembled with Draka cable CAT. 7!



#### CHARACTERISTICS

- Category: CAT. 6<sub>A</sub> Class E<sub>A</sub> on Draka cable CAT. 7 UC900 SS27
- Frequency: 900 MHz
- Impedance: 100 Ω
- Conductor: copper
- Connector: shielded 8P8C RJ45
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2– ISO 11801
- Sheath: LSZH (zero halogen)
- Packaging: separate packs



LENGTH	GREY	YELLOW	GREEN	BLUE	RED	BLACK
0.3 m	850026	850101	850071	850041	850056	850086
0.5 m	850027	850102	850072	850042	850057	850087
1.0 m	850028	850103	850073	850043	850058	850088
1.5 m	850029	850104	850074	850044	850059	850089
2.0 m	850030	850105	850075	850045	850060	850090
3.0 m	850031	850106	850076	850046	850061	850091
5.0 m	850032	850107	850077	850047	850062	850092
7.5 m	850033	850108	850078	850048	850063	850093
10.0 m	850034	850109	850079	850049	850064	850094
15.0 m	850035	850148	850080	850050	850065	850095
20.0 m	850036	850111	850081	850051	850066	850096


## Dexlan

### Shielded patch cable CAT. 8.1 S/FTP snagless LSZH Up to 4 times better than CAT. 6A!



#### CHARACTERISTICS

- Category: CAT. 8.1 Class I (compatible with the lower categories)
- Frequency: 2000 MHz
- Impedance: 100 Ω
- Conductor: copper
- Connector: shielded 8P8C RJ45
- Shielding: general by copper braid, and pair by pair by aluminium foil
- Cabling standard: ANSI/TIA 568C.2– ISO 11801
- Sheath: LSZH (zero halogen)
- Packaging: separate packs

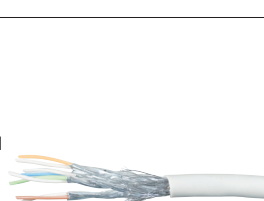

LENGTH	GREY
0.5 m	858560
1.0 m	858561
1.5 m	858562
2.0 m	858563
3.0 m	858564
5.0 m	858565
10.0 m	858566

# LED Cables - RJ45



## Unshielded CAT. 6A U/UTP RJ45 cables with LED tracking - 10 Gigabit CAT. 6A

**CHARACTERISTIC**

- Category : CAT. 6A
- Conductor : copper AWG 24/7
- Sheath : black PVC
- Marking : length at ends



REF. 2050929

LENGTH	REF.
CAT. 6A U/UTP patch cable	0.6 m <b>844910</b>
CAT. 6A U/UTP patch cable	0.9 m <b>844911</b>
CAT. 6A U/UTP patch cable	1.2 m <b>844912</b>
CAT. 6A U/UTP patch cable	1.5 m <b>844913</b>
CAT. 6A U/UTP patch cable	1.8 m <b>844914</b>
CAT. 6A U/UTP patch cable	2.1 m <b>844915</b>
CAT. 6A U/UTP patch cable	2.4 m <b>844916</b>
CAT. 6A U/UTP patch cable	2.7 m <b>844917</b>
CAT. 6A U/UTP patch cable	3.1 m <b>844918</b>
CAT. 6A U/UTP patch cable	4.0 m <b>844919</b>
CAT. 6A U/UTP patch cable	4.9 m <b>844920</b>
ACCESSORIES	
Light injector with charger - red	<b>845021</b>
Light injector with charger - white	<b>845020</b>
Light injector with charger - green	<b>845022</b>

## Unshielded CAT. 6A U/UTP RJ45 cables with LED tracking - 10 Gigabit Long length! CAT. 6A

**CHARACTERISTIC**

- Category : CAT. 6A
- Conductor : copper AWG 24/7
- Sheath : black PVC
- Marking : length at ends
- Packaging: separate packs
- 2 pulling PLUGCAP® cables included

**PLUS PRODUCT!**  
2 pulling PLUGCAP® cables included to protect connectors and ease installation



LENGTH	REF.
CAT. 6A U/UTP patch cable	6.1 m <b>844970</b>
CAT. 6A U/UTP patch cable	7.9 m <b>844971</b>
CAT. 6A U/UTP patch cable	9.7 m <b>844972</b>
CAT. 6A U/UTP patch cable	12.2 m <b>844973</b>
CAT. 6A U/UTP patch cable	15.2 m <b>844974</b>
CAT. 6A U/UTP patch cable	20.0 m <b>844975</b>
CAT. 6A U/UTP patch cable	25.0 m <b>844976</b>
CAT. 6A U/UTP patch cable	30.0 m <b>844977</b>
ACCESSORIES	
Light injector with charger - red	<b>845021</b>
Light injector with charger - white	<b>845020</b>
Light injector with charger - green	<b>845022</b>

## Shielded CAT. 6A U/FTP RJ45 cables with LED tracking 10 Gigabit LSZH CAT. 6A

**CHARACTERISTIC**

- Category : CAT. 6A
- Conductor : copper AWG 24/7
- Sheath : black LSZH
- Marking : length at ends



LENGTH	REF.
CAT. 6A U/FTP patch cable	0.6 m <b>844921</b>
CAT. 6A U/FTP patch cable	0.9 m <b>844922</b>
CAT. 6A U/FTP patch cable	1.2 m <b>844923</b>
CAT. 6A U/FTP patch cable	1.5 m <b>844924</b>
CAT. 6A U/FTP patch cable	1.8 m <b>844925</b>
CAT. 6A U/FTP patch cable	2.1 m <b>844926</b>
CAT. 6A U/FTP patch cable	2.4 m <b>844927</b>
CAT. 6A U/FTP patch cable	2.7 m <b>844928</b>
CAT. 6A U/FTP patch cable	3.1 m <b>844929</b>
CAT. 6A U/FTP patch cable	4.0 m <b>844930</b>
CAT. 6A U/FTP patch cable	4.9 m <b>844931</b>
ACCESSORIES	
Light injector with charger - red	<b>845021</b>
Light injector with charger - white	<b>845020</b>
Light injector with charger - green	<b>845022</b>

## Shielded CAT. 6A U/FTP RJ45 cables with LED tracking - 10 Gigabit Long length! LSZH CAT. 6A

**CHARACTERISTIC**

- Category : CAT. 6A
- Conductor : copper AWG 26/7
- Sheath : black LSZH
- Marking : length at ends
- Packaging: separate packs
- 2 pulling PLUGCAP® cables included

**PLUS PRODUCT!**  
2 pulling PLUGCAP® cables included to protect connectors and ease installation



LENGTH	REF.
CAT. 6A U/FTP patch cable	6.1 m <b>844980</b>
CAT. 6A U/FTP patch cable	7.9 m <b>844981</b>
CAT. 6A U/FTP patch cable	9.7 m <b>844982</b>
CAT. 6A U/FTP patch cable	12.2 m <b>844983</b>
CAT. 6A U/FTP patch cable	15.2 m <b>844984</b>
CAT. 6A U/FTP patch cable	20.0 m <b>844985</b>
CAT. 6A U/FTP patch cable	25.0 m <b>844986</b>
CAT. 6A U/FTP patch cable	30.0 m <b>844987</b>
ACCESSORIES	
Light injector with charger - red	<b>845021</b>
Light injector with charger - white	<b>845020</b>
Light injector with charger - green	<b>845022</b>




## Patchsee network cables :



- Instant identification of one end of the cable to the other by light visualization.
- Secured identification of computer links by LED tracking.
- Universal and compatible solution for all cabling systems.
- Cables identification, even in production, without disconnecting or disturbing the link.

LIGHTING WITHOUT DISCONNECTING,  
ONE END OF THE RJ45 CABLE

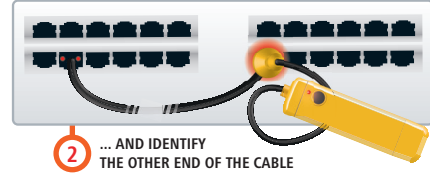

## Unshielded CAT. 6 U/UTP RJ45 cables with LED tracking



### CHARACTERISTIC

- Category : CAT. 6
- Conductor : copper AWG 24/7
- Sheath : black PVC
- Marking : length at ends



	LENGTH	REF.
CAT. 6 U/UTP patch cable	0.6 m	<b>844932</b>
CAT. 6 U/UTP patch cable	1.2 m	<b>844933</b>
CAT. 6 U/UTP patch cable	1.5 m	<b>844934</b>
CAT. 6 U/UTP patch cable	2.1 m	<b>844935</b>
CAT. 6 U/UTP patch cable	3.1 m	<b>844936</b>
CAT. 6 U/UTP patch cable	4.9 m	<b>844937</b>
ACCESSORIES		
Light injector with charger - red		<b>845021</b>
Light injector with charger - white		<b>845020</b>
Light injector with charger - green		<b>845022</b>

## Shielded CAT. 6 U/FTP RJ45 cables with LED tracking



### CHARACTERISTIC

- Category : CAT. 6
- Conductor : copper AWG 26/7
- Sheath : black LSZH
- Marking : length at ends



	LENGTH	REF.
CAT. 6 U/FTP patch cable	0.6 m	<b>844940</b>
CAT. 6 U/FTP patch cable	1.2 m	<b>844941</b>
CAT. 6 U/FTP patch cable	1.5 m	<b>844942</b>
CAT. 6 U/FTP patch cable	2.1 m	<b>844943</b>
CAT. 6 U/FTP patch cable	3.1 m	<b>844944</b>
CAT. 6 U/FTP patch cable	4.9 m	<b>844945</b>
ACCESSORIES		
Light injector with charger - red		<b>845021</b>
Light injector with charger - white		<b>845020</b>
Light injector with charger - green		<b>845022</b>

## Unshielded CAT. 5e U/UTP RJ45 cables with LED tracking



### CHARACTERISTIC

- Category : CAT. 5e
- Conductor : copper AWG 24/7
- Sheath : black PVC
- Marking : length at ends




	LENGTH	REF.
CAT. 5e U/UTP patch cable	0.6 m	<b>844950</b>
CAT. 5e U/UTP patch cable	1.2 m	<b>844951</b>
CAT. 5e U/UTP patch cable	1.5 m	<b>844952</b>
CAT. 5e U/UTP patch cable	2.1 m	<b>844953</b>
CAT. 5e U/UTP patch cable	3.1 m	<b>844954</b>
CAT. 5e U/UTP patch cable	4.9 m	<b>844955</b>
ACCESSORIES		
Light injector with charger - red		<b>845021</b>
Light injector with charger - white		<b>845020</b>
Light injector with charger - green		<b>845022</b>

## Shielded CAT. 5e F/UTP RJ45 cables with LED tracking



### CHARACTERISTIC

- Category : CAT. 5e
- Conductor : copper AWG 26/7
- Sheath : black LSZH
- Marking : length at ends



	LENGTH	REF.
CAT. 5e F/UTP patch cable	0.6 m	<b>844960</b>
CAT. 5e F/UTP patch cable	1.2 m	<b>844961</b>
CAT. 5e F/UTP patch cable	1.5 m	<b>844962</b>
CAT. 5e F/UTP patch cable	2.1 m	<b>844963</b>
CAT. 5e F/UTP patch cable	3.1 m	<b>844964</b>
CAT. 5e F/UTP patch cable	4.9 m	<b>844965</b>
ACCESSORIES		
Light injector with charger - red		<b>845021</b>
Light injector with charger - white		<b>845020</b>
Light injector with charger - green		<b>845022</b>

# LED Cables - RJ45

## Ultra thin CAT. 6A U/UTP RJ45 cable with LED tracking



### CHARACTERISTICS

- Category : CAT. 6A
- Conductor : copper AWG 28/7
- Cable outer diameter : 3.8mm
- Sheath : black PVC
- Marking : length at ends



ThinPATCH

	LENGTH	REF.
Ultra thin CAT. 6A U/UTP RJ45	0.6 m	<b>845150</b>
Ultra thin CAT. 6A U/UTP RJ45	1.2 m	<b>845152</b>
Ultra thin CAT. 6A U/UTP RJ45	1.5 m	<b>845153</b>
Ultra thin CAT. 6A U/UTP RJ45	2.1 m	<b>845155</b>
Ultra thin CAT. 6A U/UTP RJ45	3.1 m	<b>845158</b>
ACCESSORIES		
Light injector with charger - red		<b>845021</b>
Light injector with charger - white		<b>845020</b>
Light injector with charger - green		<b>845022</b>

## Ultra thin CAT. 6A U/FTP RJ45 cable with LED tracking



### CHARACTERISTICS

- Category : CAT. 6A
- Conductor : copper AWG 28/7
- Cable outer diameter : 4.7mm
- Sheath : black LSZH
- Marking : length at ends



ThinPATCH

	LENGTH	REF.
Ultra thin CAT. 6A U/FTP RJ45	0.6 m	<b>845161</b>
Ultra thin CAT. 6A U/FTP RJ45	1.2 m	<b>845163</b>
Ultra thin CAT. 6A U/FTP RJ45	1.5 m	<b>845164</b>
Ultra thin CAT. 6A U/FTP RJ45	2.1 m	<b>845166</b>
Ultra thin CAT. 6A U/FTP RJ45	3.1 m	<b>845169</b>
ACCESSORIES		
Light injector with charger - red		<b>845021</b>
Light injector with charger - white		<b>845020</b>
Light injector with charger - green		<b>845022</b>

## Detachable color marking ring

16 colors to identify all your cables!

### CHARACTERISTICS

- Quick and easy visual identification of your PatchSee cables
- Protective tab of the locking pin
- Packaging: bag of 50 pieces of the same color



	COLOUR	REF.
PatchClip	Flashy green	<b>845000</b>
PatchClip	Flashy blue	<b>845001</b>
PatchClip	Orange	<b>845002</b>
PatchClip	Flashy pink	<b>845003</b>
PatchClip	Pink	<b>845004</b>
PatchClip	Red	<b>845005</b>
PatchClip	Green	<b>845006</b>
PatchClip	Grey	<b>845007</b>
PatchClip	Yellow	<b>845008</b>
PatchClip	Blue	<b>845009</b>
PatchClip	Light blue	<b>845010</b>
PatchClip	Purple	<b>845011</b>
PatchClip	Light green	<b>845012</b>
PatchClip	Turquoise	<b>845013</b>
PatchClip	Black	<b>845014</b>
PatchClip	White	<b>845015</b>

## CAT. 6A U/UTP Deskpatch

The RJ45 cable always at the right length!



### CHARACTERISTICS



- Category : CAT. 6A
- Conductor : copper AWG 24/7
- Length : 0 to 5 m
- Sheat : PVC
- Cable reel : included

**PLUS PRODUCT !**  
Cable holder which can be fixed, screwed or glued everywhere. Unroll to the correct length and «curl» the unused cable

	COLOUR	REF.
Deskpatch	Plum	<b>845100</b>
Deskpatch	Green apple	<b>845101</b>
Deskpatch	Shiny white	<b>845102</b>
Deskpatch	Sky blue	<b>845103</b>

## CAT. 6A F/UTP Deskpatch

The RJ45 cable always at the right length!



### CHARACTERISTICS



- Category : CAT. 6A
- Conductor : copper AWG 24/7
- Length : 0 to 5 m
- Sheat : PVC
- Cable reel : included

**PLUS PRODUCT !**  
Cable holder which can be fixed, screwed or glued everywhere. Unroll to the correct length and «curl» the unused cable

	COLOUR	REF.
Deskpatch	Plum	<b>845115</b>
Deskpatch	Green apple	<b>845116</b>
Deskpatch	Shiny white	<b>845117</b>
Deskpatch	Sky blue	<b>845118</b>



